


Sports Flooring System

Dynamik Point Elastic Flooring

Seamless Polyurethane

DYNAMIK

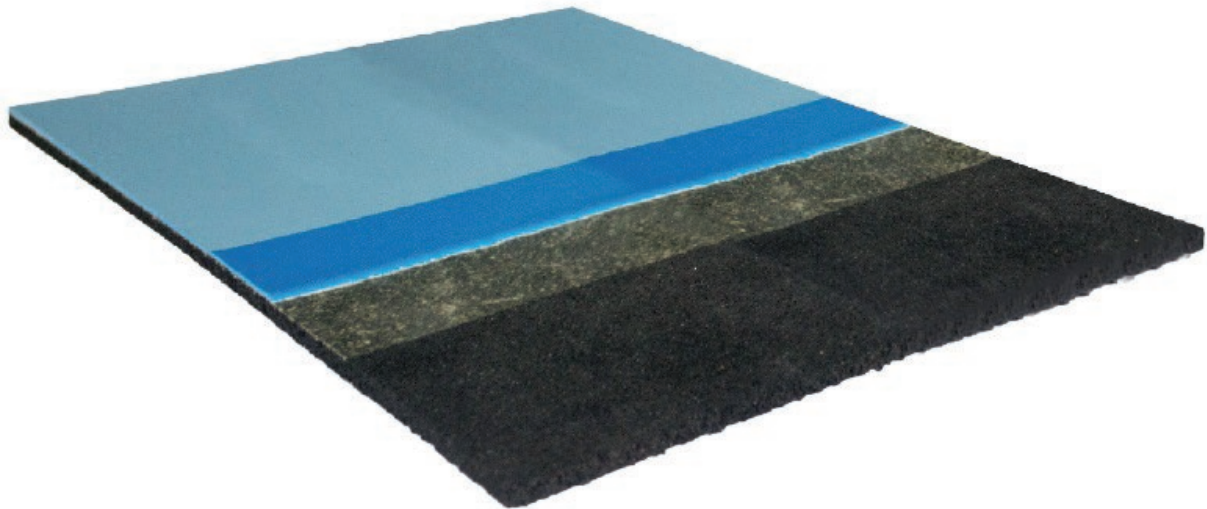

The Dynamik Point Elastic sports floor system comprises of a rubber crumb pad finished with in a seamless polyurethane surface.

Seamless polyurethane brings the advantage of seamless installation. The surface finish will require periodic re-painting throughout its life in order to maintain its appearance and slip resistance.

The depth of the rubber crumb can be altered to achieve P1, P2 or P3 performance criteria.



Point Elastic Benefits

- Meets the requirements of EN 14904
- Multi functional sports floor
- Seamless surface finish
- Easy to clean
- Large range of RAL colours available

Surface Finishes

Range of RAL colours illustrated below:



RAL 6017



RAL 5014



RAL 1011



RAL 6021



RAL 5024



RAL 7001

Sports Flooring Track & Gym Acoustic Walling Maintenance & Protection

0117 3015120 • info@dynamiksport.co.uk • www.dynamiksportsfloors.co.uk


Sports Flooring System

Dynamik Point Elastic Flooring

Seamless Polyurethane



Technical Specifications

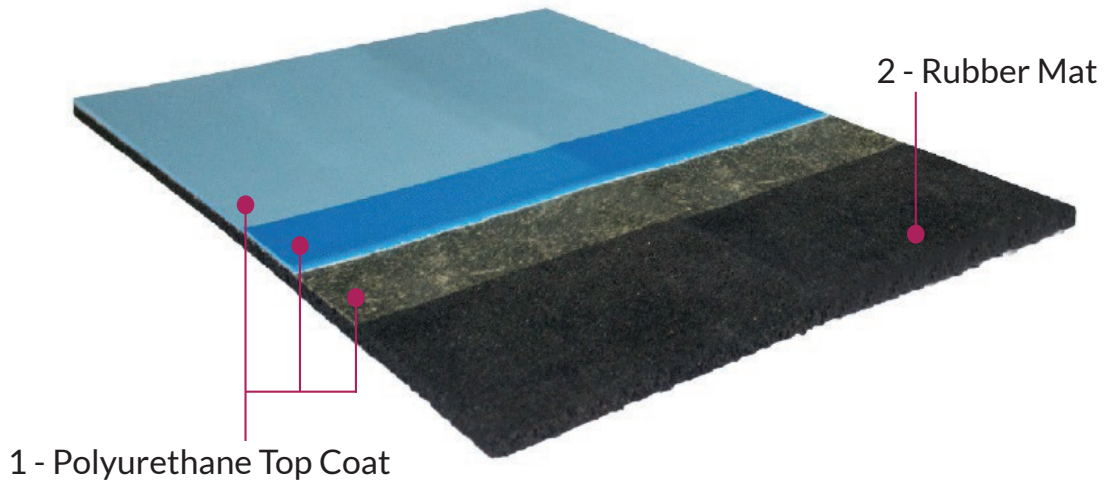

			P1	P2	P3
1	Poured	Polyurethane Top Coat - Poured depth 0.1mm	0.1mm	0.1mm	0.1mm
	Wear Layer	Polyurethane Wear Layer - Poured depth 1.8mm	1.8mm	1.8mm	1.8mm
		Pore Filler Coat - Poured depth 0.1mm	0.1mm	0.1mm	0.1mm
2	Prefabricated Rubber Crumb Mat		7mm	9mm	14mm
Total Construction Height			9mm	11mm	16mm

Performance Characteristics

Certification - EN14904	Class P1	Class P2	Class P3
Shock Absorption	≥25% <35%	≥35% < 45%	≥ 45%
Vertical Deformation	≤ 2.0mm	≤ 3.0mm	≤ 3.5mm
Rolling Load	< 1,500 N	< 1,500 N	< 1,500 N
Ball Rebound	≥ 90%	≥ 90%	≥ 90%
Slip Resistance	80 - 110	80 - 110	80 - 110

Specification Downloads



NBS
www.ribaproductselector.com/dynamik-sports-floors