


# Internal Sports Walling System Guidance Notes




DYNAMIK panels provide a fast and efficient internal sports walling solution, manufactured from engineered timber. It can be installed as an independent wall system when combined with structured SFS or timber studwork. This eliminates the need for blockwork and other wet trades.



Typical studwork construction to accommodate DYNAMIK Internal Walling

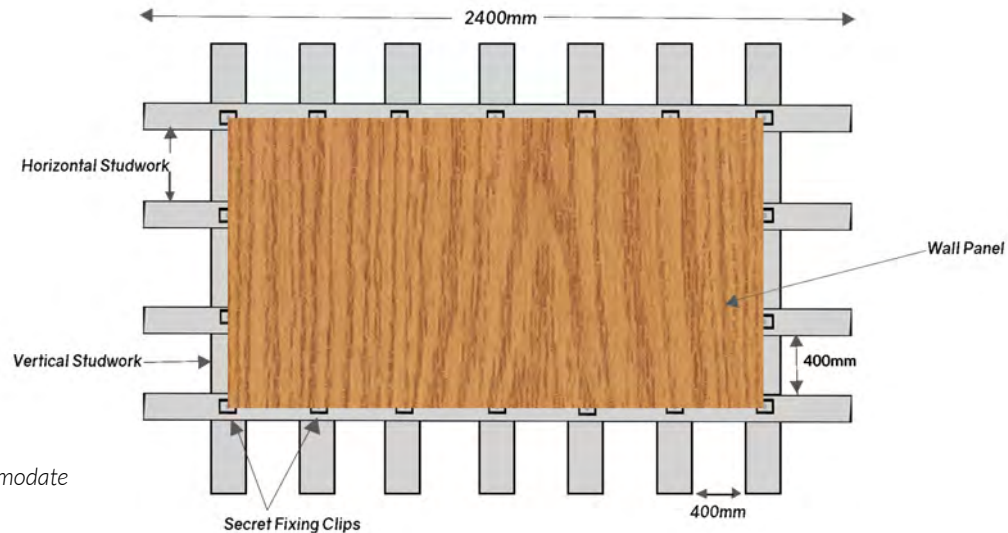

The panels are fixed to metal or timber vertical/horizontal studwork at 400mm centres which must be level without undulation or steps. Studwork or the supporting structure must be free of flex and movement.



Insulation must be placed behind the panels to achieve required thermal and acoustic values.

The panels are then installed using the supplied secret clips, to ensure a consistent 7mm spacing between adjoining boards. The secret clips must be fully supported by the vertical, horizontal or solid supporting framework.



A black acoustic fleece is installed behind the panels to hide studwork and disguise the fixing clips.

There is no need to drill the panels as they are already pre-routed to fit easily onto the secret fixing clips.



The panels are fixed using the secret clips which are to be placed into the pre-routed edges to leave the appearance of a fixture free installation.

DYNAMIK panels have a factory-applied finish and do not require coating on site.

Each panel weighs approximately 14kg/m<sup>2</sup>.



At the corners the clips should be mounted vertically to capture the board you are fixing and the next. The screws should be black so as to appear invisible once fixed through the clips.

Product specifications may be subject to change without notice, please contact DYNAMIK for the latest product information