
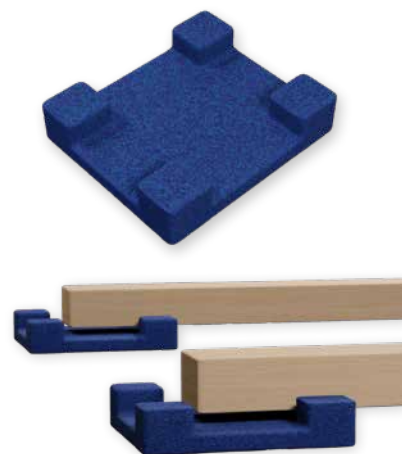


# Sports Flooring System

## DYNAMIK Flexi-Beam Plus

### Sprung Area Elastic Sports Floor

# DYNAMIK

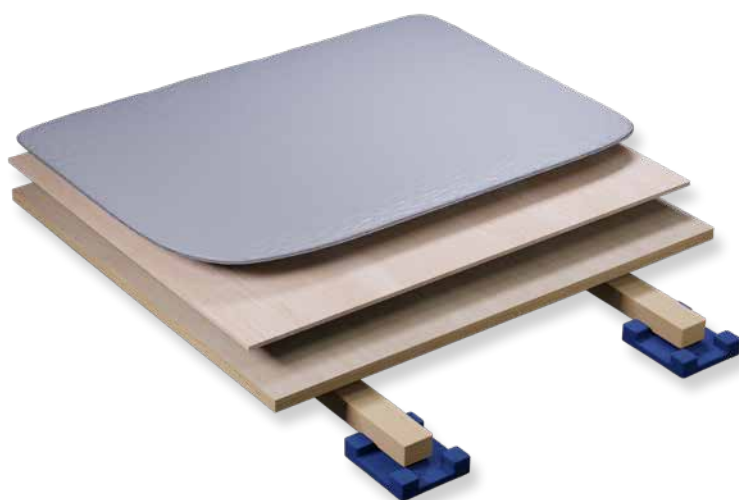

The DYNAMIK Flexi-Beam Plus system is a sprung area elastic sports floor. It incorporates elastic Flexi-Beams which support a counter floor and load distribution panel to accommodate a range of solid synthetic playing surfaces including Sport Vinyl, Sport Linoleum, Sport Polyurethane and Sport Rubber. It can be packed and levelled to take out variations in the sub floor, thus removing the need for a levelling screed. The structure of the Flexi-Beam Plus system allows for underfloor heating and insulation to be incorporated if required.


With a range of solid synthetic finishes it is ideal for both sporting and non-sporting activities.

## Flexi-Beam Plus Benefits

- Meets the requirements of EN 14904
- Sport England compliant
- Packed & levelled construction
- Suited to both sport and non-sport activities
- Durable and easy to maintain
- Underfloor heating compatible
- Low maintenance costs
- 25 year warranty

## Surface Finishes


The Flexi-Beam Plus system can be installed with a range of solid synthetic playing surfaces such as Sport Vinyl, Sport Linoleum, Sport Polyurethane and Sport Rubber.




Sport Vinyl



Sport Linoleum



Sport Polyurethane




Sport Rubber

## Official Partners



# DYNAMIK Flexi-Beam Plus

## Technical Specifications

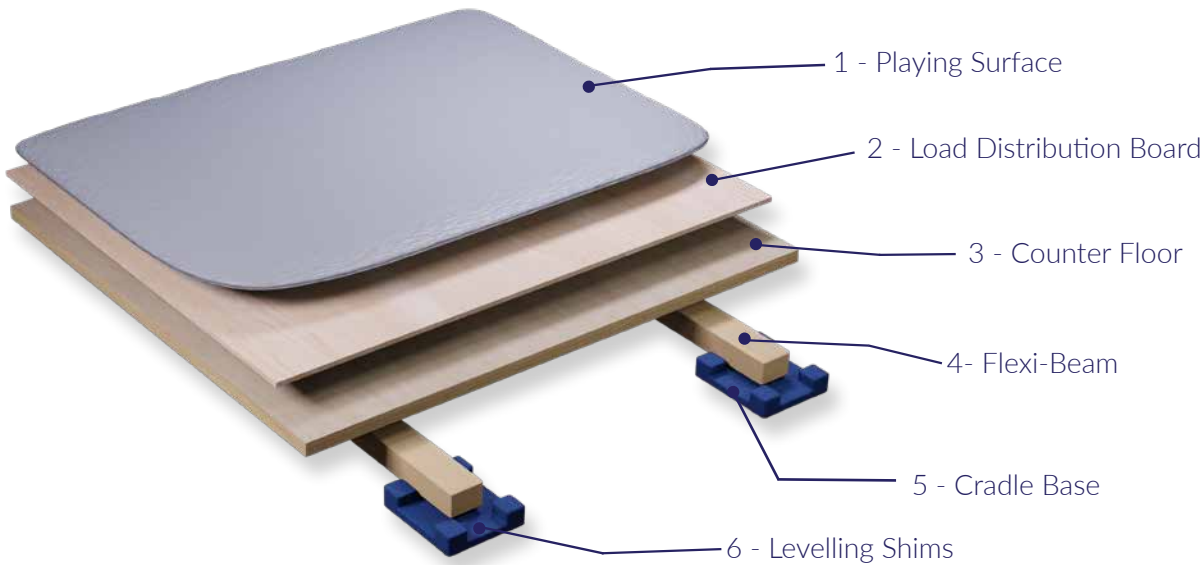

1	Playing Surface	As Specified
2	Load Distribution Board	6mm
3	Counter Floor: (T+G Modules)	18mm
4	Flexi-Beam	43mm
5	Sports Cradle: 100mm x 100mm x 10mm	10mm
6	Levelling Shims	To Suit Void
System Thickness (excluding levelling shims)		77mm
A minimum void (drop in screed) of 85mm is required to install, pack and level the system based on an SR3 structural slab (this allows for a +/- 10mm level tolerance of the slab)..		

## Performance Characteristics

Certification - EN14904	Class A3	Class A4
Shock Absorption	40% < 55%	55% < 75%
Vertical Deformation	1.8 mm < 3.5mm	2.3 mm < 5.0mm
Rolling Load	≥ 1,500 N	≥ 1,500 N
Ball Rebound	≥ 90%	≥ 90%
Slip Resistance	80 - 110	80 - 110

## Specification Downloads



Product Specification downloads for our DYNAMIK products are available through NBS Source.

Product specifications may be subject to change without notice, please contact DYNAMIK for the latest product information