

Sports Flooring System

DYNAMIK Point Elastic

Seamless Polyurethane



DYNAMIK
The Sports Surfacing Specialist

Official Provider



The DYNAMIK Point Elastic sports floor system comprises of a rubber crumb pad finished with in a seamless polyurethane surface.

Seamless polyurethane brings the advantage of seamless installation. The surface finish will require periodic re-painting throughout its life in order to maintain its appearance and slip resistance.

The depth of the rubber crumb can be altered to achieve P1, P2 or P3 performance criteria.

Point Elastic Benefits

- Meets the requirements of EN 14904
- Multi functional sports floor
- Seamless surface finish
- Easy to clean
- Large range of RAL colours available

Surface Finishes

Range of RAL colours illustrated below:



RAL 6017



RAL 5014



RAL 1011



RAL 6021



RAL 5024



RAL 7001

Official Partners



DYNAMIK P1, P2, P3


Point Elastic Flooring

Technical Specifications



DYNAMIK
The Sports Surfacing Specialist

Official Provider

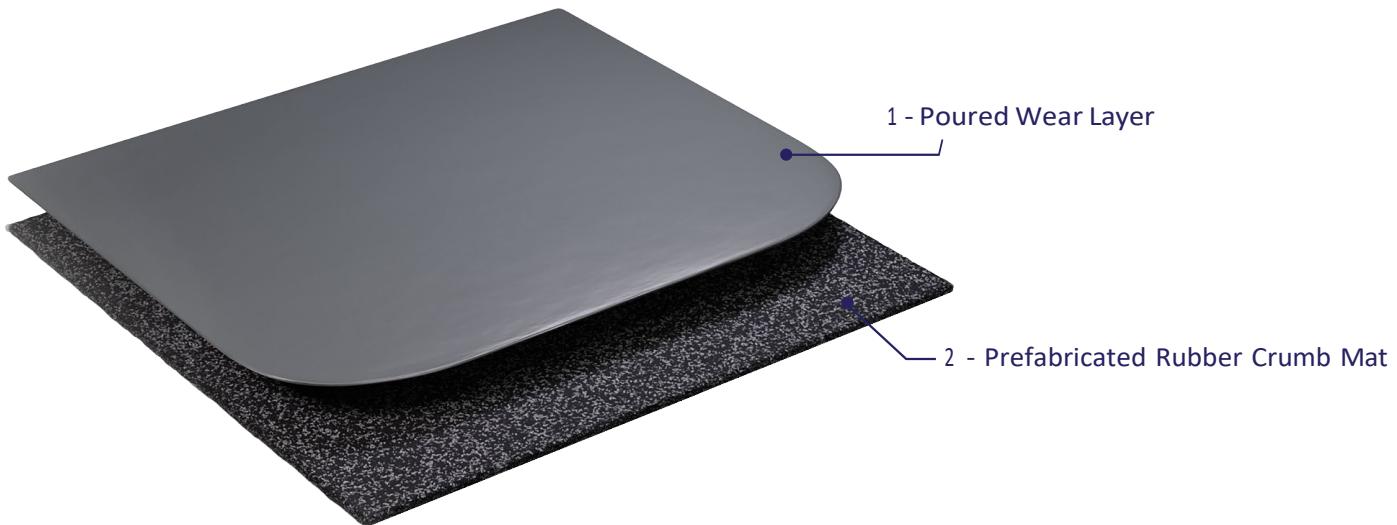

		P1	P2	P3
1	Polyurethane Wear Layer + Surface Coat - Poured depth 1.8mm	2mm	2mm	2mm
2	Prefabricated Rubber Crumb Mat	7mm	9mm	14mm
	Total Construction Height	9mm	11mm	16mm

Performance Characteristics

Certification - EN14904	Class P1	Class P2	Class P3
Shock Absorption	$\geq 25\% < 35\%$	$\geq 35\% < 45\%$	$\geq 45\%$
Vertical Deformation	$\leq 2.0\text{mm}$	$\leq 3.0\text{mm}$	$\leq 3.5\text{mm}$
Rolling Load	$< 1,500 \text{ N}$	$< 1,500 \text{ N}$	$< 1,500 \text{ N}$
Ball Rebound	$\geq 90\%$	$\geq 90\%$	$\geq 90\%$
Slip Resistance	80 - 110	80 - 110	80 - 110

Specification Downloads



Product Specification downloads for our DYNAMIK products are available through NBS Source.

Visit Us



Product specifications may be subject to change without notice, please contact DYNAMIK for the latest product information

Sports Flooring

Acoustic Walling

Track & Gym

Maintenance & Protection