

# Solid Sport Vinyl Synthetic Playing Surface



We illustrate below samples of the 2mm Solid Sport Vinyl playing surface. This can be combined with sprung systems, DYNAMIK Komfort Plus, Athen & DYNAMIK Flexi-Beam Plus, to provide a durable high performance sports floor, ideal for both sporting and non-sporting multi-usage.



**Uni Tonic Green**

#NCS: S5040-G LRV 13



**Uni Sky Blue**

#NCS: S4040-R90B LRV 19



**Uni Night Blue**

#NCS: S4050-R90B LRV 12




**Uni Tonic Blue**

#NCS: S6030-R90B LRV 7




**Uni Teal**

#NCS: S3050-B40G LRV 19




**Uni Silver Grey**

#NCS: S3502-B LRV 38



**Uni Grey**

#NCS: S5500-N LRV 21



**Uni Black**

#NCS: S9000-N LRV 5



**Uni Tonic Yellow**

#NCS: S2050-Y LRV 48



**Uni Tonic Orange**

#NCS: S2070-Y50R LRV 25



**Uni Tonic Red**

#NCS: S1580-Y90R LRV 13




**Wood Grey Maple**

#NCS: S5502-Y80R LRV 19




**Wood Light Maple**

#NCS: S2010-Y20R LRV 47




**Wood Golden Maple**

#NCS: S3030-Y20R LRV 36



**Wood Classic Oak**

#NCS: S4030-Y20R LRV 24



**Wood Nordic Oak**

#NCS: S3005-Y50R LRV 45

\*Please note: More Colours Available on Request

#National Colour System number

Product specifications may be subject to change without notice, please contact DYNAMIK for the latest product information

# | Sport Vinyl

# DYNAMIK


## | Sport Vinyl Benefits

- Extremely durable – High resistance to indentation and rolling loads
- Excellent slip resistance – Optimum level of grip for indoor sports
- Easy to maintain – Virtually maintenance free with low life cycle costs
- Solid playing surface – Not foam-backed, ideal for wheelchair sports
- Wood effect – Available in Classic Oak, Golden Maple or Beech
- Sports Performance – Sport England and ESFA compliant


## | Technical & Performance Information When Combined With Our Komfort Plus, Athen & Flexi-Beam Plus

|                               | Sport Vinyl           |
|-------------------------------|-----------------------|
| Certification                 | EN 14904              |
| Shock Absorption              | 40% <75%              |
| Vertical Deformation          | 1.8 mm <5.0 mm        |
| Rolling Load                  | ≥1,500 N              |
| Ball Rebound                  | ≥ 90%                 |
| Reaction to fire              | Bfl s1                |
| Impact Sound Reduction        | ≥ 20 db               |
| Underfloor Heating Compatible | Yes (Flexi-Beam Plus) |

### DYNAMIK Komfort Plus

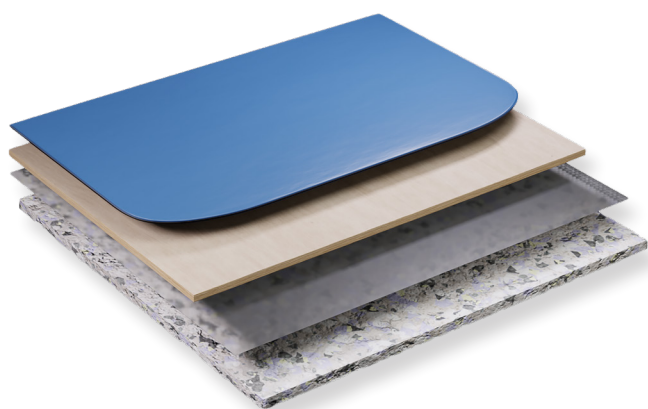

### DYNAMIK Flexi-Beam Plus

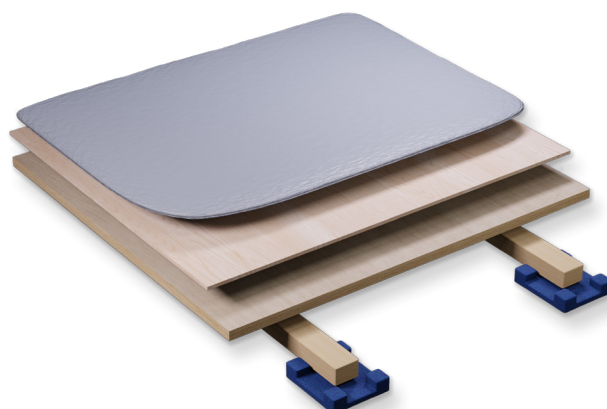

## | Official Partners

