

# Sports Flooring System DYNAMIK Point Elastic Seamless Polyurethane

# DYNAMIK



The DYNAMIK Point Elastic sports floor system comprises of a rubber crumb pad finished with in a seamless polyurethane surface.

Seamless polyurethane brings the advantage of seamless installation. The surface finish will require periodic re-painting throughout its life in order to maintain its appearance and slip resistance.

The depth of the rubber crumb can be altered to achieve P1, P2 or P3 performance criteria.

## Point Elastic Benefits

- Meets the requirements of EN 14904
- Multi functional sports floor
- Seamless surface finish
- Easy to clean
- Large range of RAL colours available

## Surface Finishes

Range of RAL colours illustrated below:



RAL 6017



RAL 5014



RAL 1011



RAL 6021



RAL 5024



RAL 7001


## Official Partners



# DYNAMIK P1, P2, P3

## Point Elastic Flooring

### Technical Specifications

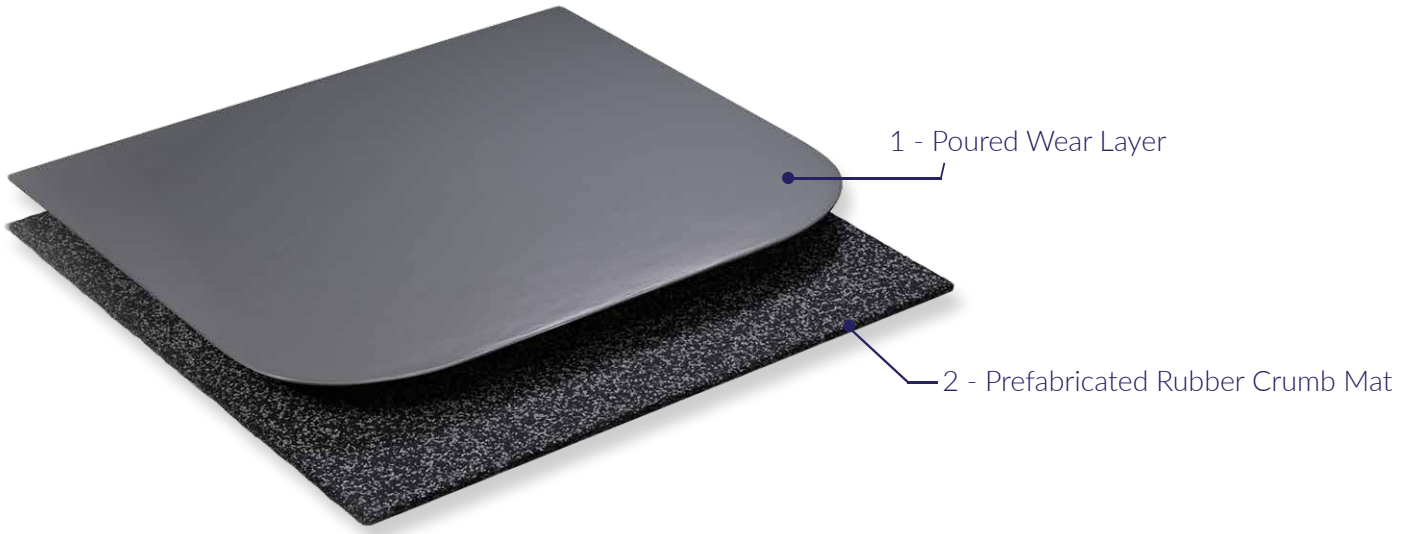

		P1	P2	P3
1	Polyurethane Wear Layer + Surface Coat - Poured depth 1.8mm	2mm	2mm	2mm
2	Prefabricated Rubber Crumb Mat	7mm	9mm	14mm
Total Construction Height		9mm	11mm	16mm

## Performance Characteristics

Certification - EN14904	Class P1	Class P2	Class P3
Shock Absorption	≥25% <35%	≥35% < 45%	≥ 45%
Vertical Deformation	≤ 2.0mm	≤ 3.0mm	≤ 3.5mm
Rolling Load	< 1,500 N	< 1,500 N	< 1,500 N
Ball Rebound	≥ 90%	≥ 90%	≥ 90%
Slip Resistance	80 - 110	80 - 110	80 - 110

## Specification Downloads



Product Specification downloads for our DYNAMIK products are available through NBS Source.

\*Product specifications may be subject to change without notice, please contact DYNAMIK for the latest product information