


# Sports Flooring System

## Dynamik Point Elastic Flooring

Seamless Polyurethane

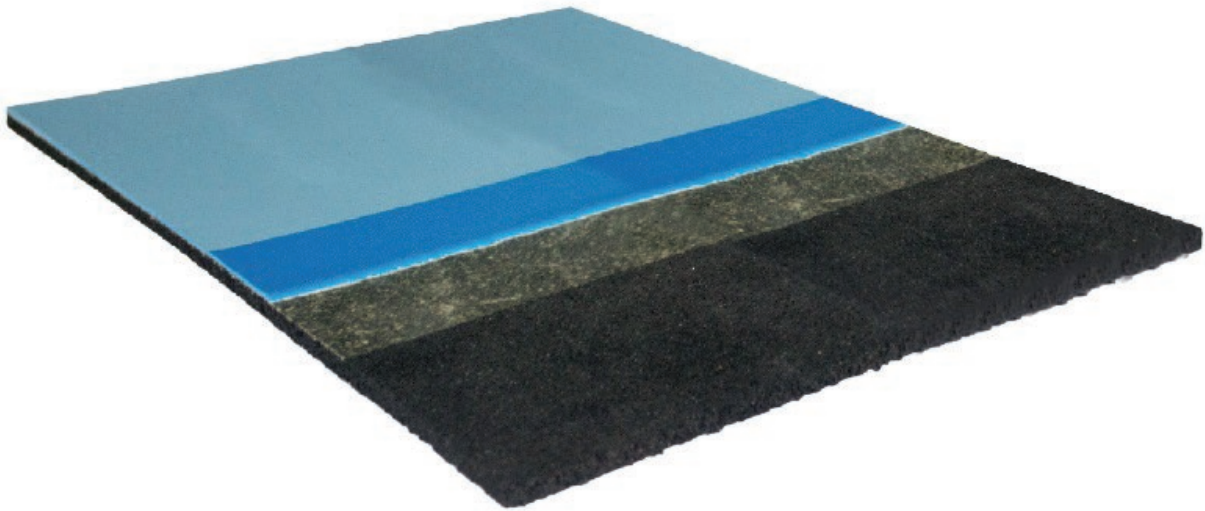

The Dynamik Point Elastic sports floor system comprises of a rubber crumb pad finished with in a seamless polyurethane surface.

Seamless polyurethane brings the advantage of seamless installation. The surface finish will require periodic re-painting throughout its life in order to maintain its appearance and slip resistance.

The depth of the rubber crumb can be altered to achieve P1, P2 or P3 performance criteria.



### Point Elastic Benefits

- Meets the requirements of EN 14904
- Multi functional sports floor
- Seamless surface finish
- Easy to clean
- Large range of RAL colours available

### Surface Finishes

Range of RAL colours illustrated below:



RAL 6017



RAL 5014



RAL 1011



RAL 6021



RAL 5024



RAL 7001


# Sports Flooring System

## Dynamik Point Elastic Flooring

Seamless Polyurethane



### Technical Specifications

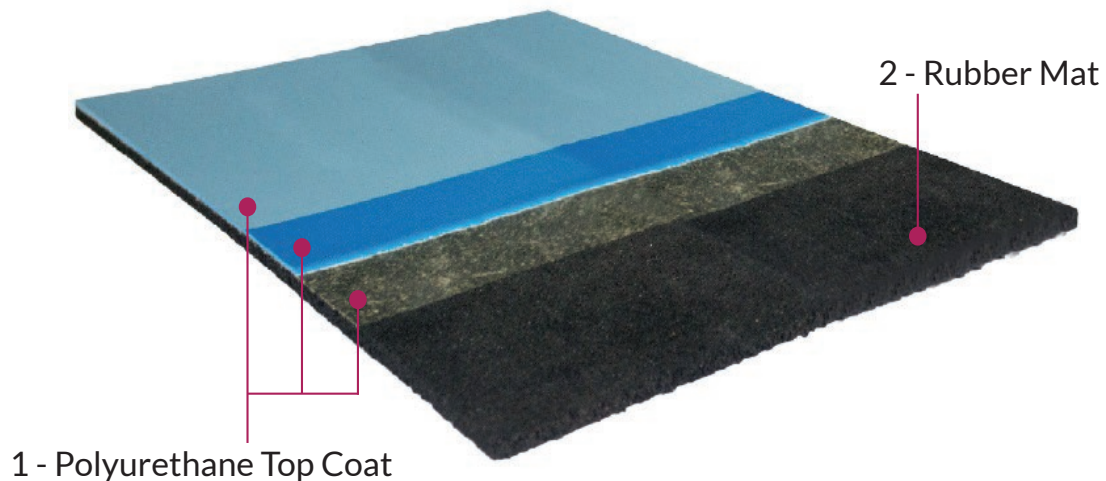

			P1	P2	P3
1	Poured Wear Layer	Polyurethane Top Coat - Poured depth 0.1mm	0.1mm	0.1mm	0.1mm
		Polyurethane Wear Layer - Poured depth 1.8mm	1.8mm	1.8mm	1.8mm
		Pore Filler Coat - Poured depth 0.1mm	0.1mm	0.1mm	0.1mm
2	Prefabricated Rubber Crumb Mat		7mm	9mm	14mm
Total Construction Height			9mm	11mm	16mm

### Performance Characteristics

Certification - EN14904	Class P1	Class P2	Class P3
Shock Absorption	≥25% <35%	≥35% < 45%	≥ 45%
Vertical Deformation	≤ 2.0mm	≤ 3.0mm	≤ 3.5mm
Rolling Load	< 1,500 N	< 1,500 N	< 1,500 N
Ball Rebound	≥ 90%	≥ 90%	≥ 90%
Slip Resistance	80 - 110	80 - 110	80 - 110

### Specification Downloads



NBS  
[www.ribaproductselector.com/dynamik-sports-floors](http://www.ribaproductselector.com/dynamik-sports-floors)

Sports Flooring
 Track & Gym
 Acoustic Walling
 Maintenance & Protection

0117 3015120 • info@dynamiksport.co.uk • www.dynamiksportsfloors.co.uk

010117