

Sports Flooring System DYNAMIK Komfort Elite Play Sprung Timber Sports and Activity Floor

DYNAMIK



The DYNAMIK Komfort Elite Play is a low profile sprung area elastic sports floor system. It is designed to be installed onto a level SR1 screed (+/- 3mm over 2m) and incorporates an engineered premium sports board.


The system consists of a comfort based elastic layer over which a load distribution board is installed prior to the engineered premium sports board. Consistent sports performance is guaranteed as every part of the surface is equally supported by the high density elastic layer.

Komfort Elite Play Benefits

- Meets the requirements of EN 14904
- Sport England compliant
- Ideal for overlaying existing surfaces
- Low construction height - ideal for refurbishment
- Complies with the latest ESFA specification
- Multi-activities including sports & dance
- 8 coats of factory finished lacquer-seal
- 25 year warranty
- Good acoustic reduction
- High comfort, ideal for children & low impact activities

Surface Finishes


The Komfort Elite Play engineered sports board is available in three different wood species: European Oak, Ash and Canadian Maple.

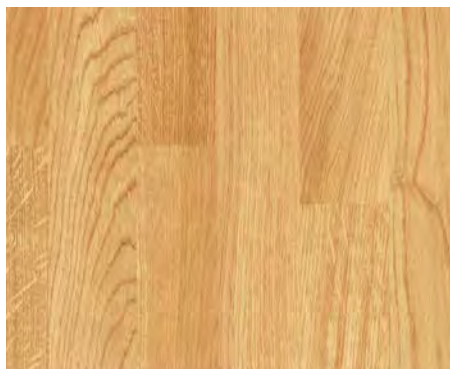

European Oak



Ash

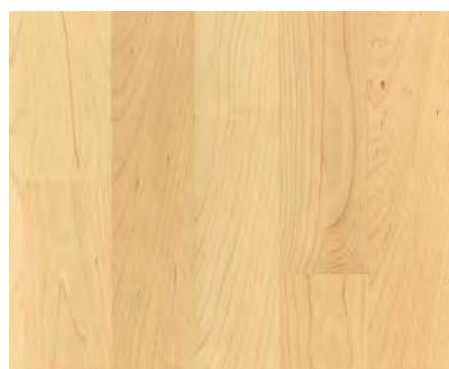


Canadian Maple

Official Partners



DYNAMIK Komfort Elite Play

Technical Specifications

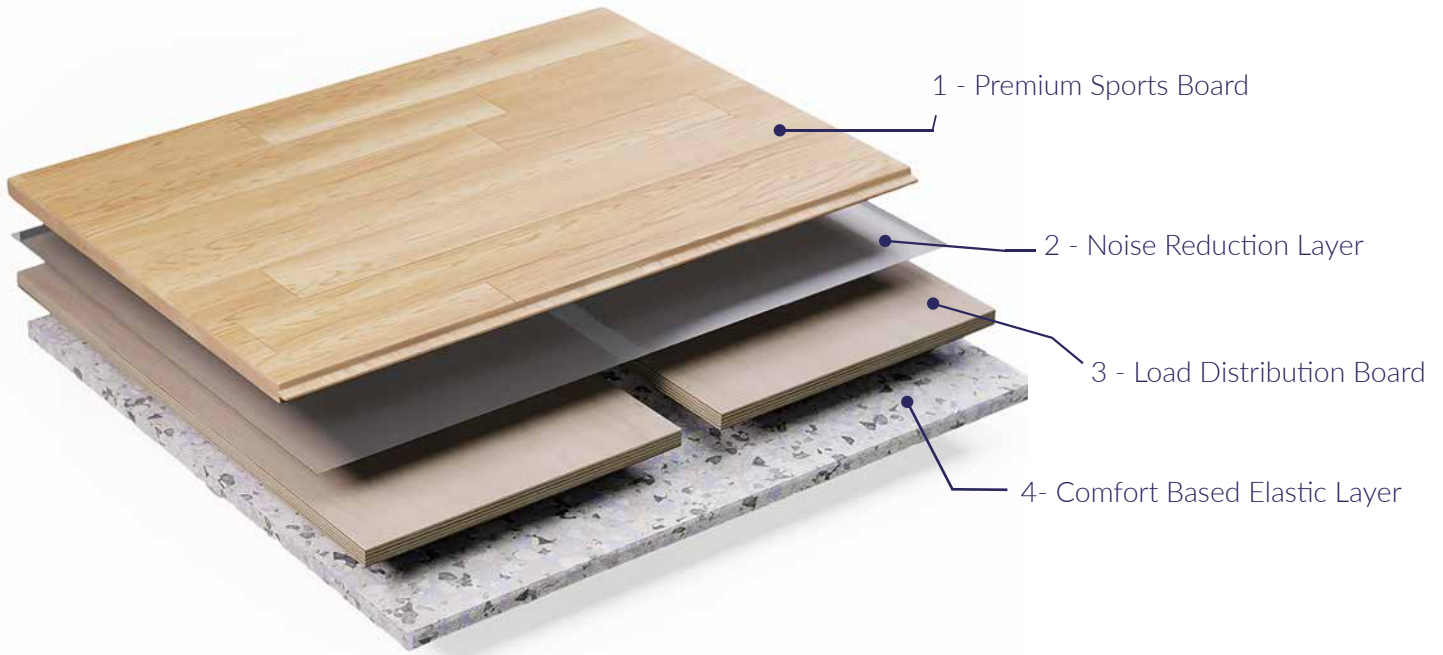

1	Premium Sports Board	13.5mm
2	Noise Reduction Layer - Polyethylene	0.03mm
3	Load Distribution Board - (T & G)	12mm
4	Comfort Based Elastic Layer	10mm
Total Construction Height		35.53mm

Performance Characteristics

Certification - EN14904	Class A4
Shock Absorption	55% < 75%
Vertical Deformation	2.3 mm < 5.0mm
Rolling Load	≥ 1,500 N
Ball Rebound	≥ 90%
Slip Resistance	80 - 110

Specification Downloads



Product Specification downloads for our DYNAMIK products are available through NBS Source.

Product specifications may be subject to change without notice, please contact DYNAMIK for the latest product information