

Sports Floor Protection

DYNAMIK Giant Carpet Tiles



DYNAMIK
The Sports Surfacing Specialist


Official Provider

DYNAMIK Giant Protective Carpet Tiles convert a sports facility into a temporary venue for school exams, non-sporting social or community events. The tiles protect sports flooring by providing a high level of resistance to wear, indentation and abrasion as well as creating an environment that is acoustically and visually pleasing when set up for non-sporting events.

Our tiles are quick and easy to install when combined with our distribution and storage trolleys providing facilities with a safe and economical method of installation.



Oceanic Blue

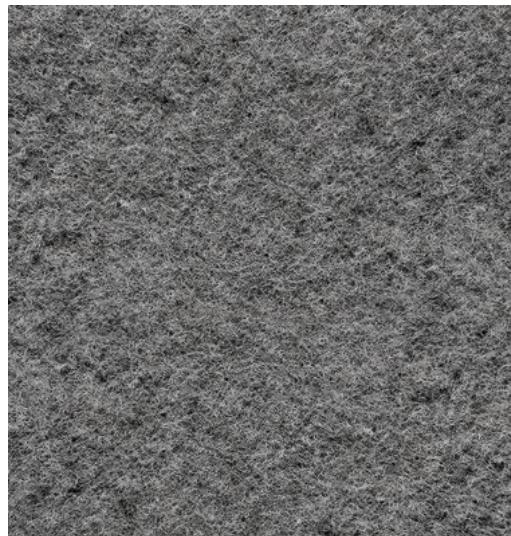

Pebble Grey



Charcoal Grey



Earth Brown

Official Partners



Sports Floor Protection

DYNAMIK Giant Carpet Tiles



DYNAMIK
The Sports Surfacing Specialist

Official Provider

DYNAMIK Giant Carpet Tile Benefits

- Designed specifically for Sports Floors
- Superior Indentation Resistance
- Scuff-free, high-grip backing (no bitumen)
- Underfloor Heating Compatible
- Easy to transport & store with DYNAMIK trolley
- 100 Carpet Tiles (200m²) per trolley
- No adhesive or tape required
- Available in a variety of colours
- Fast-Track delivery available
- Ambient Noise Reduction
- 500m² of Carpet Tiles installed by two people in less than an hour

Construction

Dimension	2m x 1m
Total Thickness	5.2 mm ($\pm 10\%$)
Total Weight	3.1 kg/m ² ($\pm 10\%$)
Wear Layer	Fireproof polypropylene
Inner Layer	Latex
Backing Material	Polyolefin
Backing Weight	2,350 g/m ² ($\pm 10\%$)
Pile Weight	570 g/m ² ($\pm 10\%$)

Performance

Durability Classification (EN 1307)	Class 33 - Heavy Commercial Use
Fire Reaction (EN 13 501-1)	Bfl-S1
Acoustical Sound Absorption	$\alpha_w = 0.15$
Thermal Resistance (EN 12524)	0,08 m ² K/W
Underfloor Heating Compatibility (EN 12 524)	OK
Friction (EN 13 893)	NPD
Dimensional Stability (EN 986)	$\leq 0.2\%$ - both ways
Electrostatic Properties (ISO 6356)	E ≤ 2 kV



Product specifications may be subject to change without notice, please contact DYNAMIK for the latest product information